


## Name: All-Glass Evacuated Solar Collector Tube with Heat Pipe

### Glass Tube:

Length	1500mm	1800mm
Outer tube diameter	47mm	58mm
Inner tube diameter	37mm	47mm
Weight	1.3kg	2.2kg
Glass thickness	1.6mm	1.6mm
Material	Borosilicate Glass 3.3	Borosilicate Glass 3.3
Absorptive coating	Graded Al/N/Al	Graded Al/N/Al
Vacuum degree	$P < 5 \times 10^{-3}$ Pa	$P < 5 \times 10^{-3}$ Pa
Thermal expansion	$3.3 \times 10^{-6}$ /°C	$3.3 \times 10^{-6}$ /°C
Insolation Temperature	>200°C	>200°C
Absorptance	>93%	>93%
Emissivity	<8%	<8%
Heat loss	<0.8W/(m <sup>2</sup> °C)	<0.8W/(m <sup>2</sup> °C)
Maximum pressure	0.8Mpa	0.8Mpa
Resist cold	-35 °C	-35 °C
Resist hailstone	Ø 25mm	Ø 25mm
Resist wind	30m/s	30m/s
Start-up temperature	≤25°C	≤25°C

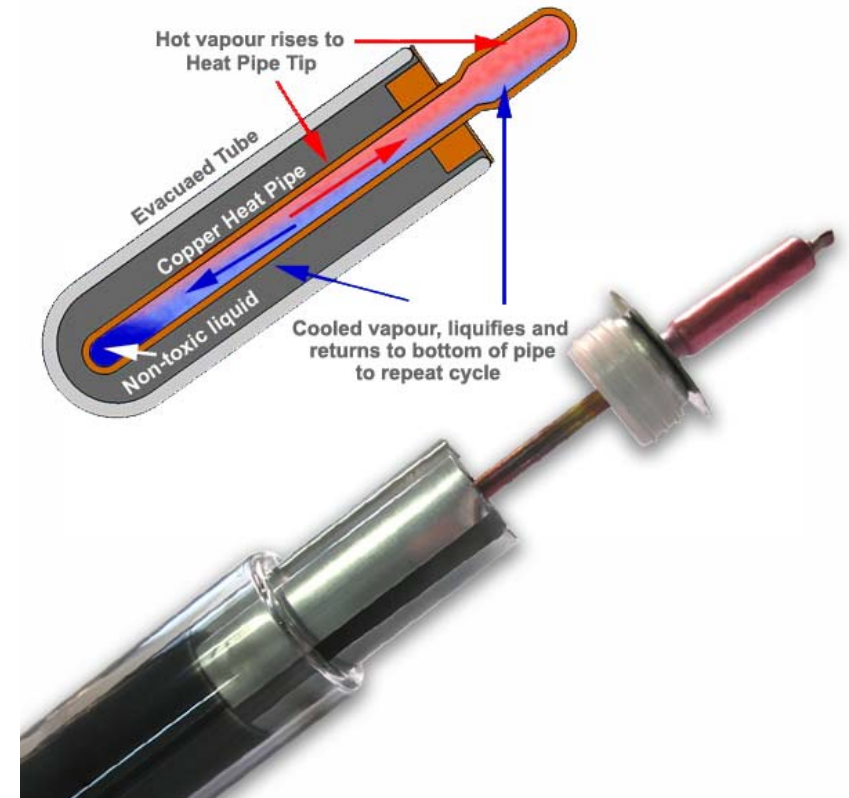

### Heat Pipe:

	$\Phi 47\text{mm} \times 1.5\text{M}$ Heat Pipe	$\Phi 58\text{mm} \times 1.8\text{M}$ Heat Pipe
<b>Copper Material</b>	TP2 Non-oxo Copper TP2	
<b>Medium</b>	Inorganic Medium	
<b>Pipe diameter</b>	$\Phi 8\text{mm}$	
<b>Dimension of heat exchange end</b>	$\Phi 14\text{mm} \times 64.5\text{mm}$	
<b>Weight</b>	196g	240g
<b>Length</b>	1370mm	1680mm
<b>Pipe thickness</b>	0.75mm	
<b>Start-up temperature</b>	$\leq 25^\circ\text{C}$	
<b>Insolation Temperature</b>	$> 250^\circ\text{C}$	

### Absorber (Heat transfer) Fin:

<b>Material</b>	Aluminum	
<b>Thickness</b>	0.15mm	
<b>Shape (Flat or Cylindrical)</b>	Cylindrical	
<b>Length</b>	1430mm	1680mm
<b>Quantity</b>	2 pcs / 1 pairs	2 pcs / 1 pairs

